



RESIDENTIAL / CONDOMINIUM / INDUSTRIAL



For swing gates up to
6 m width per leaf
Powerful 7000 N
Intensive use

VULCAN

HYDRAULIC MOTORS
FOR SWING GATES

Opening
the gates for you

www.erreka-automation.com




VULCAN

HYDRAULIC MOTORS FOR SWING GATES



Non mechanical wearing for a long lasting use
Wide range (locking systems, non locking systems)
Two sizes of piston rods (stroke 265mm, 400mm)
Fast speed operators (double speed)
All suitable for high and low temperatures
A plug-in connector for easy connection
Mechanical soft stop

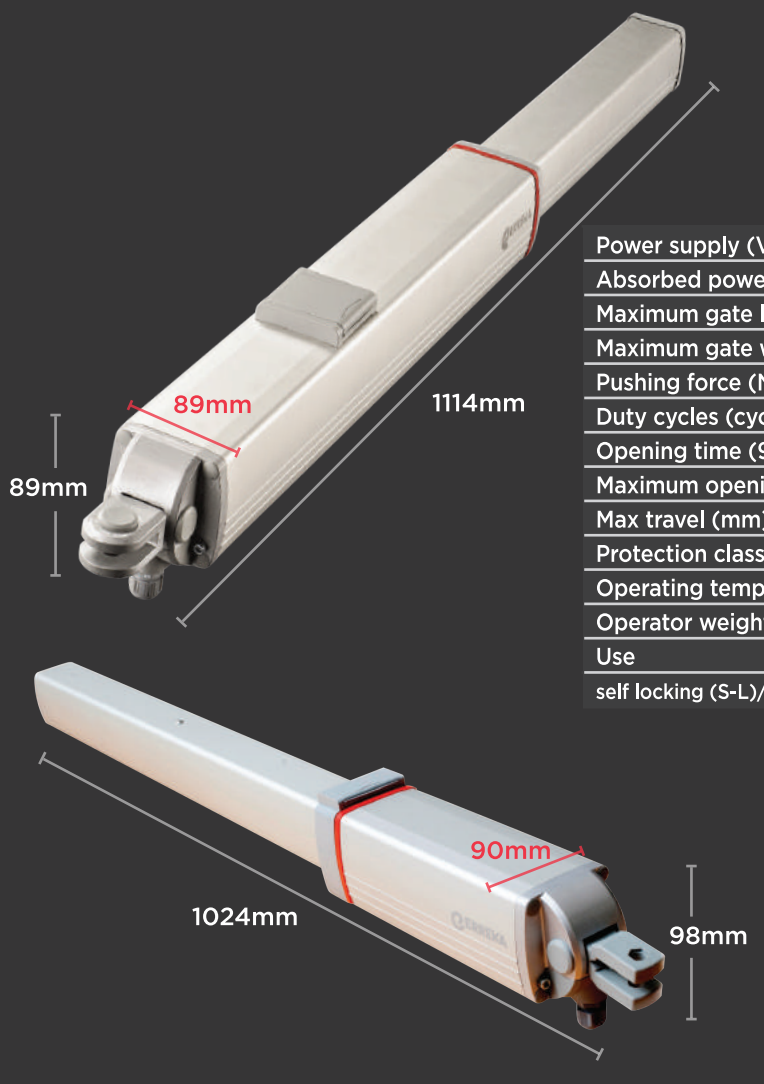

TECHNICAL DATA


	VUA13	VUA31	VUA33	VUA41	VUA43
Power supply (Vac/Hz)	230/50				
Absorbed power (W)	193		230		
Maximum gate length	2.5	6	4	6	4
Maximum gate weight (kg)	300	700			
Pushing force (N)	3000	7000			
Duty cycles (cycles/hour)	45	60			
Opening time (90°)	21	27	40		
Maximum opening angle	110°				
Max travel (mm)	265			400	
Protection class (IP)	65				
Operating temperature (°C)	-10/+60				
Operator weight (kg)	7.5	9.5	11		
Use	Residential / Condominium / Industrial				
self locking (S-L)/non locking (N-L)	S-L	N-L	S-L	N-L	S-L

* Available fast operators at double speed

** Available operators for low temperatures (-30 / +60)



INSTALLATION LAYOUT

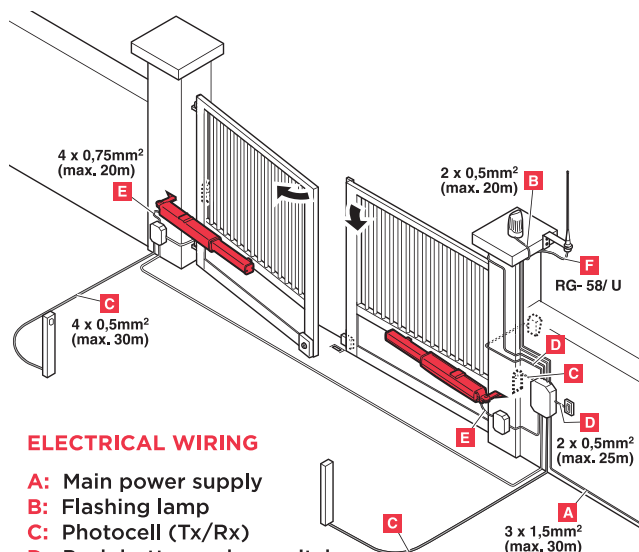

ELECTRICAL WIRING

- A:** Main power supply
- B:** Flashing lamp
- C:** Photocell (Tx/Rx)
- D:** Push button or key switch
- E:** Motor
- F:** Antenna

RECOMMENDED ACCESSORIES:

Control panel:

VIVO-M201 (Analogue)
 VIVO-M203 (Display)

Radio receiver:

IRRE2-250

Remote control:

LIRA
 IRIS

Photocell

FT06

Flashing lamp

LUMI

